


Assembly Instruction


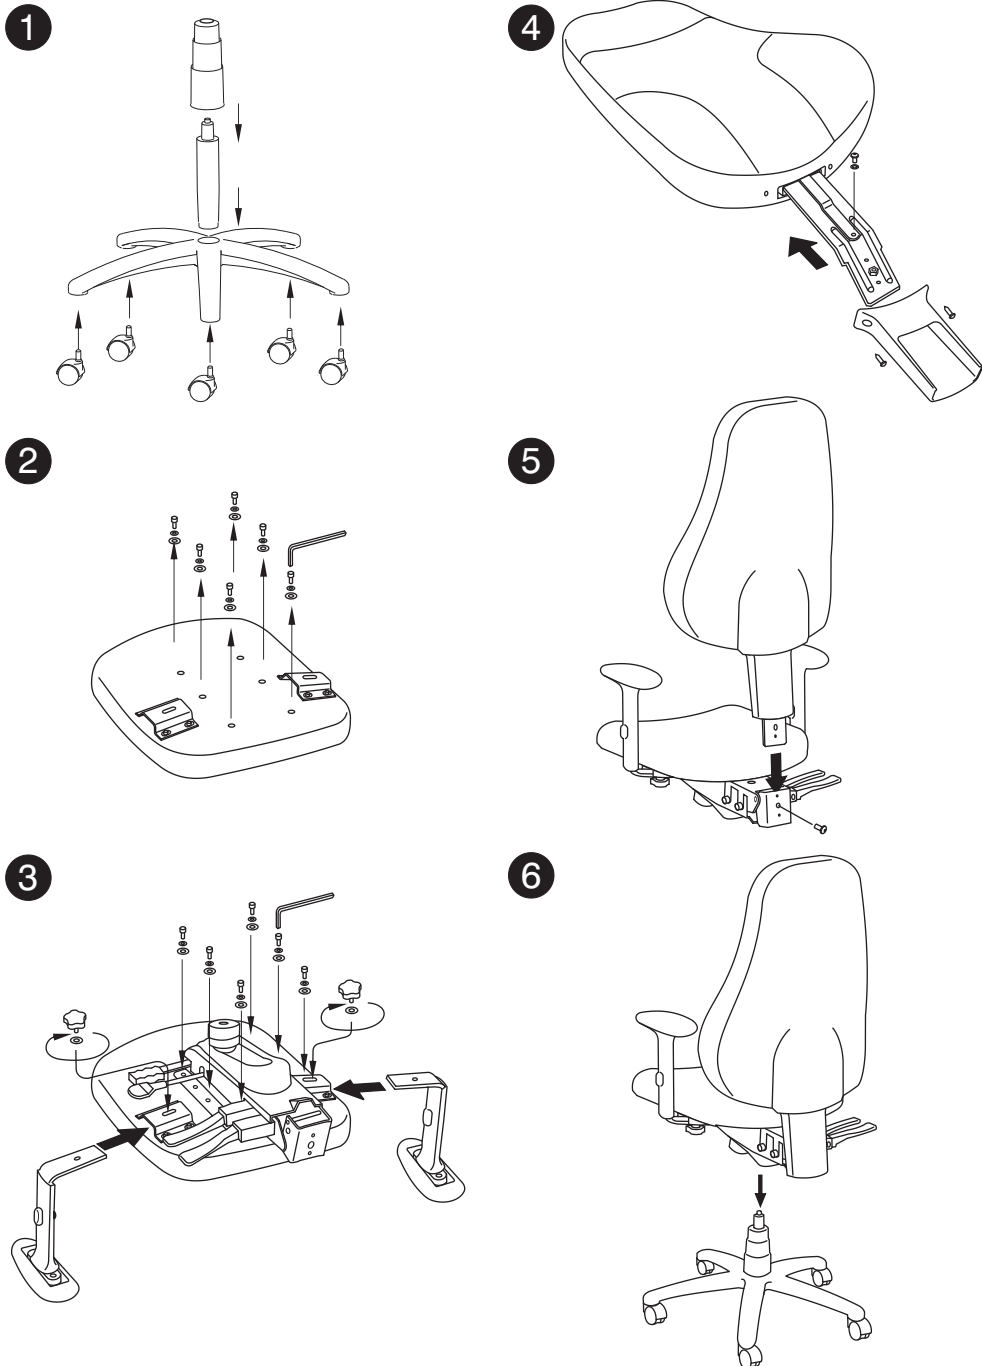


STELLA

Models

639 TQ A63 BB /


639 TS A63 BB

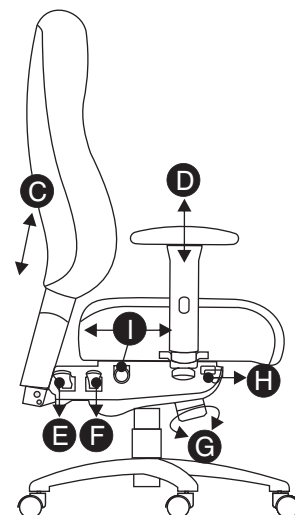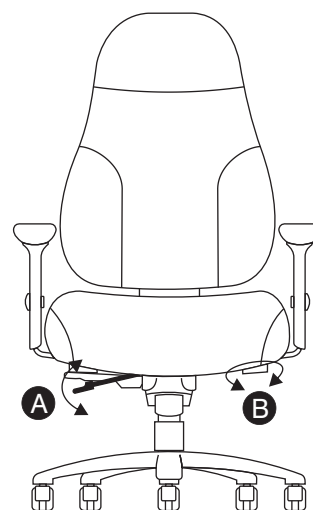

User instructions

- A Seat Height**
Flip up lever on right-side to raise or lower seat. Adjust such that your feet are adequately supported on floor.
- B Armrest Width**
Turn bottom knob clockwise to loosen the armrest and adjust inwards or outwards to suit shoulder width.
- C Backrest Height**
Hold backrest by both sides and pull up to desired height. To lower backrest, pull it to maximum height and then, return to lowest height to start again. Adjust height so that the backrest curvature follows the curve of your back.
- D Armrest Height**
Press the button and raise or lower the armrest. Adjust height to adequately support elbows to take strain off shoulders.
- E Backrest Angle**
Flip up lever to unlock backrest. Recline to desired position, and flip down lever to lock.
- F Tilt Lock**
First, ensure backrest angle is locked by flipping down **E** lever. Recline to desired angle, and flip down lever to lock. Flip up lever to release tilt-lock.
- G Tilt Tension Control**
Turn bottom knob clockwise to provide a stronger tilt tension, and vice-versa. Adjust such that minimum effort is required to push back when recline.
- H Seat Angle**
First, ensure **F** lever is unlocked (flipped up). Tilt the seat backward then push the lever to front to set the seat angle as normal. To set the seat angle forward, just tilt the seat a little bit backward then pull the lever backward. For high mobility task, is recommend to adjust the seat tilt forward.
- I Seat Depth** *(Only applicable for model 639TSA63BB)*
Pull out side lever and adjust by pushing seat forwards or backwards. Release lever to lock in desired position. Adjust depth so that seat edge clears back of knees to ensure your back always supported.

Assembly Instruction

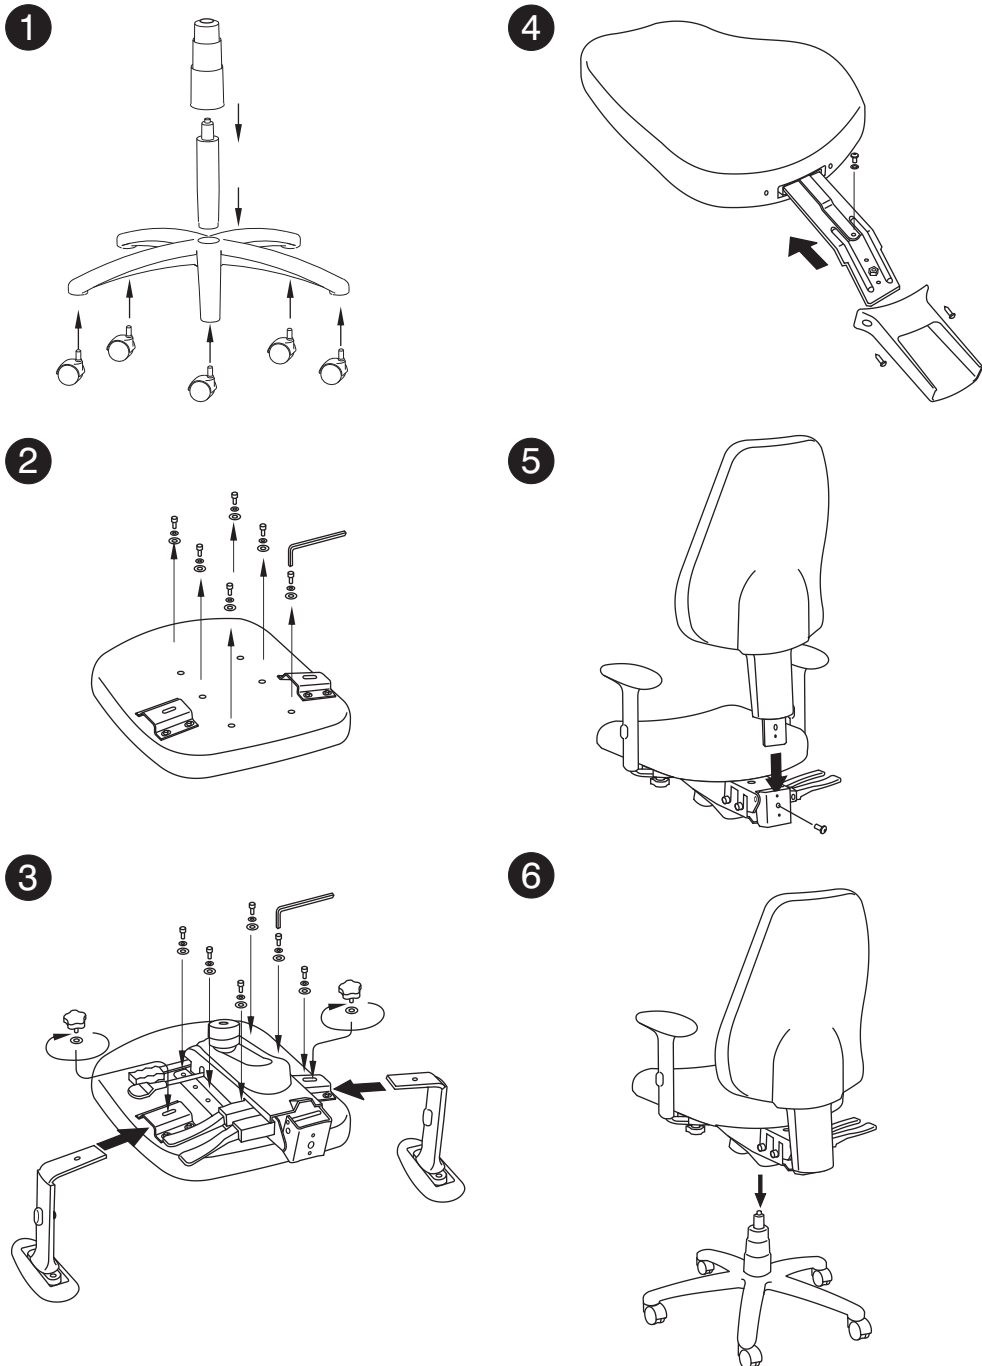



STELLA

Models


638 TQ A63 BB /
637 TQ A63 BB /
636 TQ A63 BB

User instructions

- A Seat Height**
Flip up lever on right-side to raise or lower seat. Adjust such that your feet are adequately supported on floor.
- B Armrest Width**
Turn bottom knob clockwise to loosen the armrest and adjust inwards or outwards to suit shoulder width.
- C Backrest Height**
Hold backrest by both sides and pull up to desired height. To lower backrest, pull it to maximum height and then, return to lowest height to start again. Adjust height so that the backrest curvature follows the curve of your back.
- D Armrest Height**
Press the button and raise or lower the armrest. Adjust height to adequately support elbows to take strain off shoulders.
- E Backrest Angle**
Flip up lever to unlock backrest. Recline to desired position, and flip down lever to lock.
- F Tilt Lock**
First, ensure backrest angle is locked by flipping down **E** lever. Recline to desired angle, and flip down lever to lock. Flip up lever to release tilt-lock.
- G Tilt Tension Control**
Turn bottom knob clockwise to provide a stronger tilt tension, and vice-versa. Adjust such that minimum effort is required to push back when recline.
- H Seat Angle**
First, ensure **F** lever is unlocked (flipped up). Tilt the seat backward then push the lever to front to set the seat angle as normal. To set the seat angle forward, just tilt the seat a little bit backward then pull the lever backward. For high mobility task, is recommend to adjust the seat tilt forward.

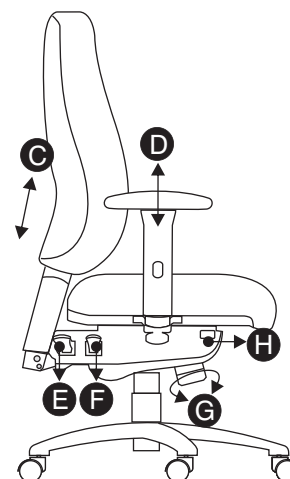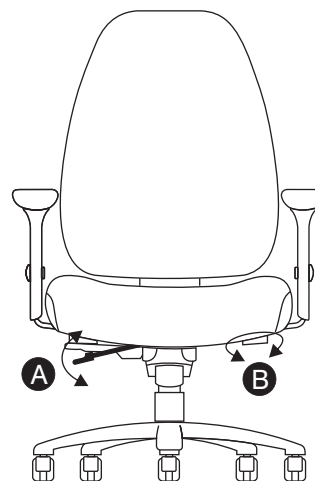

Assembly Instruction

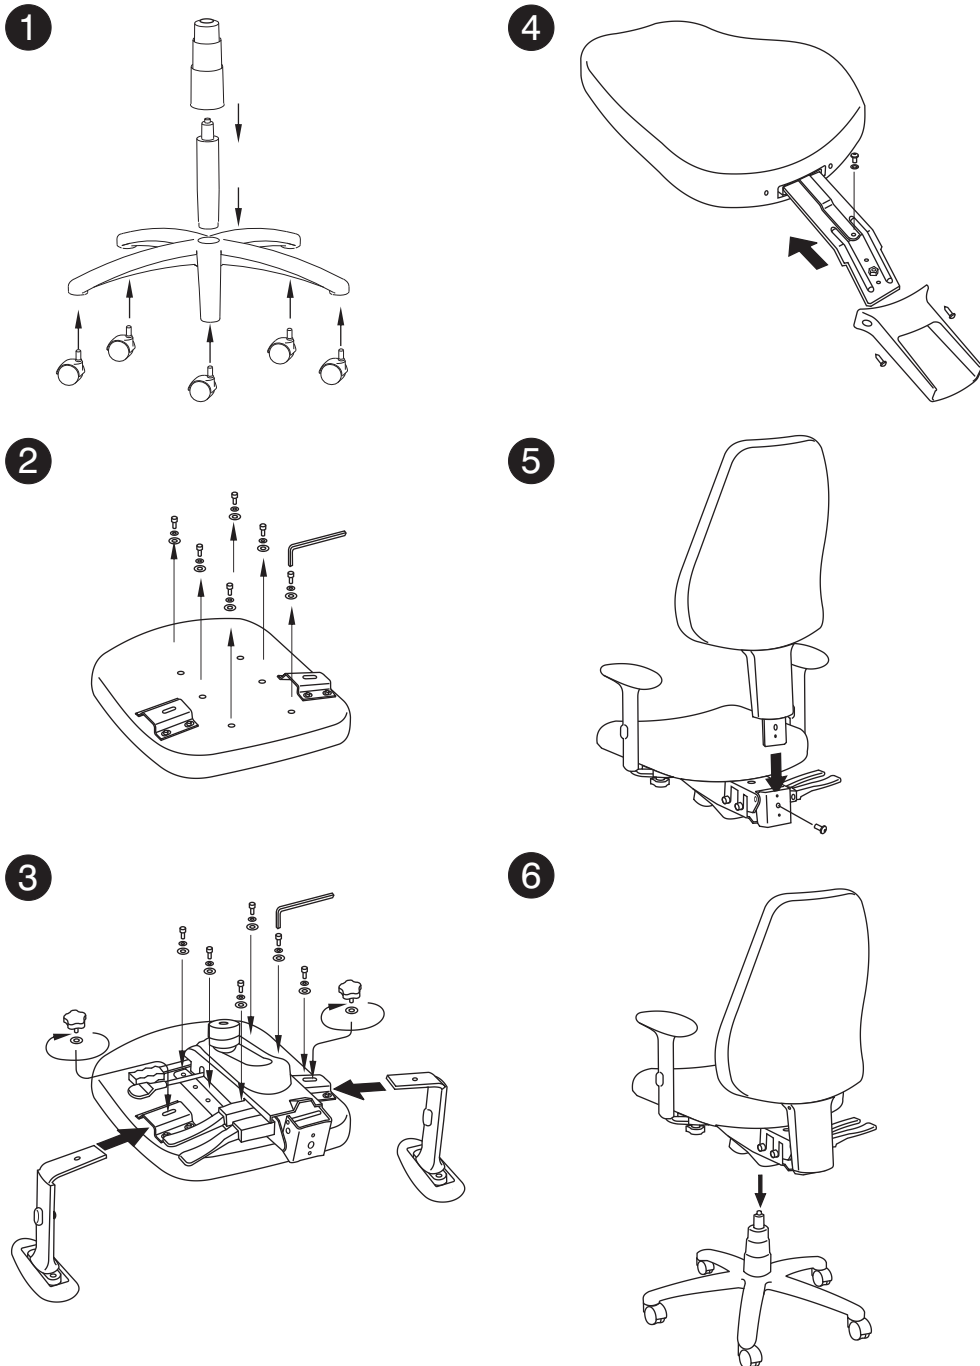

STELLA



Models

637 TQ A63 BB

(With lumbar depth adjustment)


User instructions

- A Seat Height**
Flip up lever on right-side to raise or lower seat. Adjust such that your feet are adequately supported on floor.
- B Armrest Width**
Turn bottom knob clockwise to loosen the armrest and adjust inwards or outwards to suit shoulder width.
- C Backrest Height**
Hold backrest by both sides and pull up to desired height. To lower backrest, pull it to maximum height and then, return to lowest height to start again. Adjust height so that the backrest curvature follows the curve of your back.
- D Armrest Height**
Press the button and raise or lower the armrest. Adjust height to adequately support elbows to take strain off shoulders.
- E Backrest Angle**
Flip up lever to unlock backrest. Recline to desired position, and flip down lever to lock.
- F Tilt Lock**
First, ensure backrest angle is locked by flipping down **E** lever. Recline to desired angle, and flip down lever to lock. Flip up lever to release tilt-lock.
- G Tilt Tension Control**
Turn bottom knob clockwise to provide a stronger tilt tension, and vice-versa. Adjust such that minimum effort is required to push back when recline.
- H Seat Angle**
First, ensure **F** lever is unlocked (flipped up). Tilt the seat backward then push the lever to front to set the seat angle as normal. To set the seat angle forward, just tilt the seat a little bit backward then pull the lever backward. For high mobility task, is recommend to adjust the seat tilt forward.
- I Lumbar Depth**
Turn knobs to adjust depth of lumbar support.

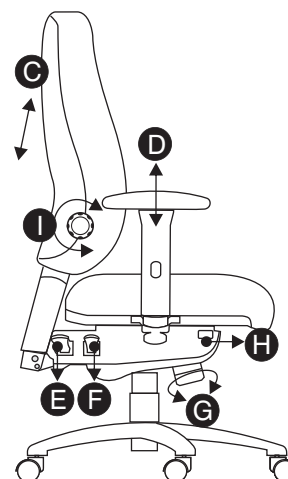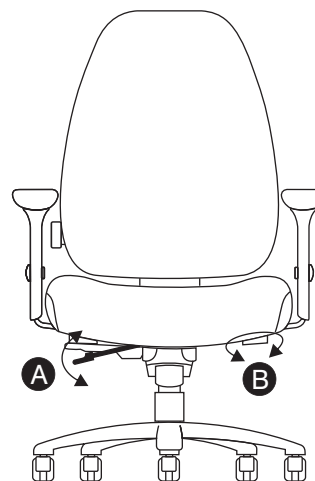


Assembly Instruction


1

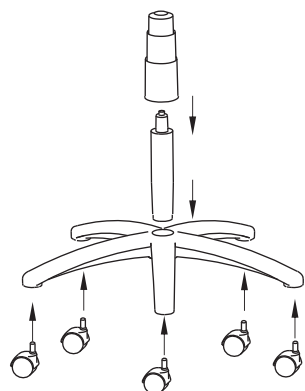


2

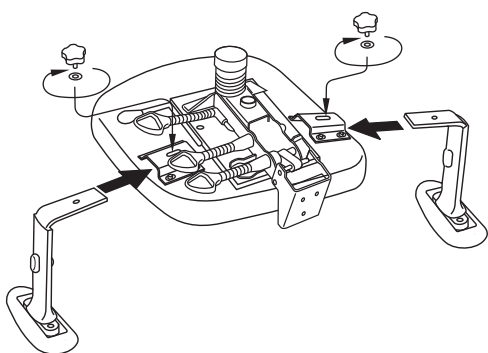

3

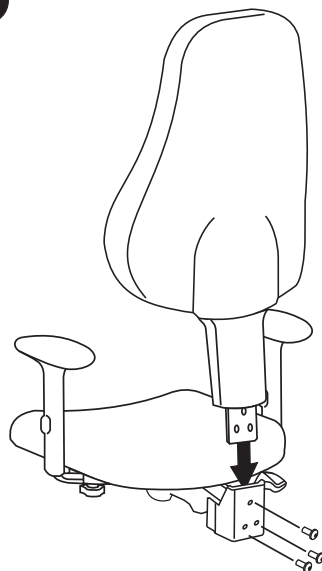

4


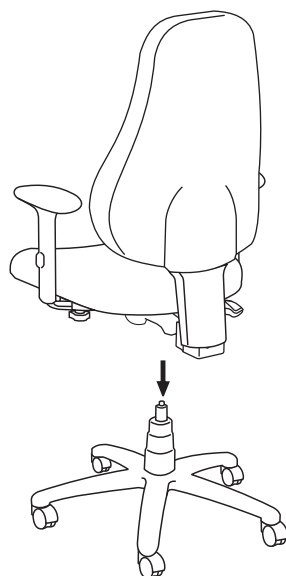


STELLA

Models

639 TJ A63 BB /

639 TS A63 BB

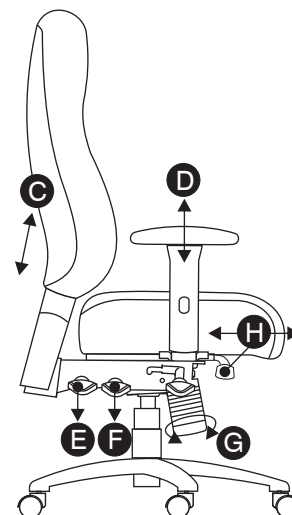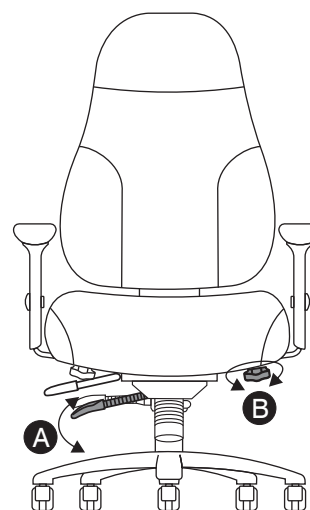

User instructions

A

Seat Height

Flip up lever on right-side to raise or lower seat. Adjust such that your feet are adequately supported on floor.

B

Armrest Width

Turn bottom knob clockwise to loosen the armrest and adjust inwards or outwards to suit shoulder width.

C

Backrest Height

Hold backrest by both sides and pull up to desired height. To lower backrest, pull it to maximum height and then, return to lowest height to start again. Adjust height so that the backrest curvature follows the curve of your back.

D

Armrest Height

Press the button and raise or lower the armrest. Adjust height to adequately support elbows to take strain off shoulders.

E

Backrest Angle

Flip up lever to unlock backrest. Recline to desired position, and flip down lever to lock.

F

Seat Tilt Lock

First, ensure backrest angle is locked by flipping down **E** lever. Recline to desired angle, and flip down lever to lock. Flip up lever to release tilt-lock.

G

Tilt Tension Control

Turn bottom knob clockwise to provide a stronger tilt tension, and vice-versa. Adjust such that minimum effort is required to push back when recline.


H

Seat Depth (Only applicable for model 639TSA63BB)


Pull out side lever and adjust by pushing seat forwards or backwards. Release lever to lock in desired position. Adjust depth so that seat edge clears back of knees to ensure your back always supported.

Assembly Instruction


1

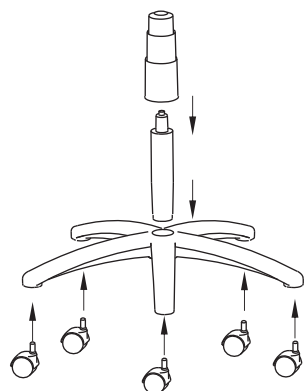


2

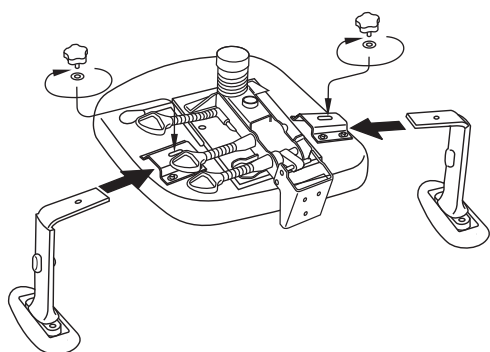

3

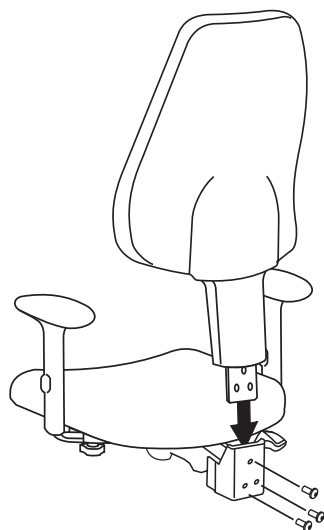

4

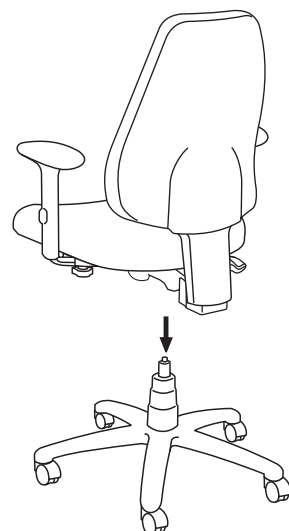

STELLA Models

638/637/636 TJ A63 BB /
638/637/636 TS A63 BB

User instructions

A

Seat Height

Flip up lever on right-side to raise or lower seat. Adjust such that your feet are adequately supported on floor.

B

Armrest Width

Turn bottom knob clockwise to loosen the armrest and adjust inwards or outwards to suit shoulder width.

C

Backrest Height

Hold backrest by both sides and pull up to desired height. To lower backrest, pull it to maximum height and then, return to lowest height to start again. Adjust height so that the backrest curvature follows the curve of your back.

D

Armrest Height

Press the button and raise or lower the armrest. Adjust height to adequately support elbows to take strain off shoulders.

E

Backrest Angle

Flip up lever to unlock backrest. Recline to desired position, and flip down lever to lock.

F

Seat Tilt Lock

First, ensure backrest angle is locked by flipping down **E** lever. Recline to desired angle, and flip down lever to lock. Flip up lever to release tilt-lock.

G

Tilt Tension Control

Turn bottom knob clockwise to provide a stronger tilt tension, and vice-versa. Adjust such that minimum effort is required to push back when recline.

H

Seat Depth (Only applicable for model 638 / 637 / 636TSA63BB)

Pull out side lever and adjust by pushing seat forwards or backwards. Release lever to lock in desired position. Adjust depth so that seat edge clears back of knees to ensure your back always supported.

